

# Product Specification




This product is certified to comply with the RoHS Directive 2002/95/EC.

## UM-4 Crystal



- 7.9x3.2x4.7mm case
- Industry standard
- Resistance welded
- Through-hole
- Wide frequency range
- Tight tolerance

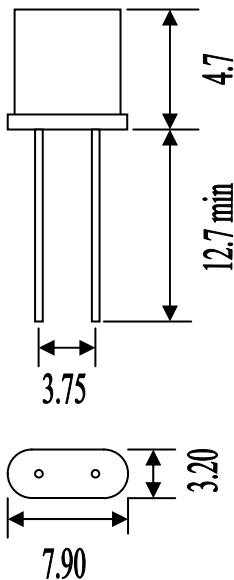

Specification	
<b>Frequency range</b>	6.00 ~ 200MHz
<b>Adjustment@25°C</b>	See Table 2
<b>Temp. Stability</b>	See Table 1
<b>Temp. range</b>	See Table 1
<b>ESR</b>	8.00 ~ 9.99MHz 40Ω 10 ~ 50MHz 25Ω 30 ~ 120MHz 40Ω (3 <sup>rd</sup> overtone) 75 ~ 200MHz 60Ω (5 <sup>th</sup> overtone)
<b>Load capacitance</b>	See Table 3
<b>Shunt capacitance</b>	7.0pF max.
<b>Drive level</b>	0.01uW typ. 1001uW max.
<b>Storage temp.</b>	-40 ~ +105°C
<b>Ageing</b>	3ppm/year max.

‘\*’ suffix denotes RoHS Compliant

Standard packing: Bulk

### Ordering Code Guide

Series Code	Frequency	Specification	Holder Type	RoHS
X	xxMxxx	G C B E	UM4	*

Magna use a 4 lettering coding system for defining standard specifications as shown below. Where other parameters are specified (such as C1 or pullability) then a customer specific datasheet will be produced. Other temperature ranges, stabilities, adjustments and load capacitances are available. Please contact us for advice.

1 <sup>st</sup> Letter	Temp. range	See Table 1
2 <sup>nd</sup> Letter	Temp. stability	See Table 1
3 <sup>rd</sup> Letter	Adjustment tolerance	See Table 2
4 <sup>th</sup> Letter	Load capacitance	See Table 3

Please note that not all combinations of temperature and stability are possible. Please see Table 1 for guide to availability.

Issue 2 07/09/10

# Product Specification



This product is certified to comply with the RoHS Directive 2002/95/EC.



## UM-4 Crystal

### Crystal Ordering Codes

**Table 1: Temperature range v. Stability**

Temp. Range & Stability		±3ppm	±5ppm	±7.5ppm	±10ppm	±15ppm	±20ppm	±30ppm	±50ppm
		<b>K</b>	<b>J</b>	<b>H</b>	<b>G</b>	<b>F</b>	<b>E</b>	<b>B</b>	<b>C</b>
0 ~ +50°C	<b>J</b>	✓	✓	✓	✓	✓	✓	✓	✓
-5 ~ +55°C	<b>H</b>	✓	✓	✓	✓	✓	✓	✓	✓
-10 ~ +60°C	<b>G</b>	-	✓	✓	✓	✓	✓	✓	✓
-20 ~ +70°C	<b>E</b>	-	✓	✓	✓	✓	✓	✓	✓
-30 ~ +80°C	<b>C</b>	-	-	✓	✓	✓	✓	✓	✓
-40 ~ +85°C	<b>M</b>	-	-	-	✓	✓	✓	✓	✓

Other temperature ranges and stabilities are available.

**Table 2: Adjustment tolerance**

±5ppm	±10ppm	±15ppm	±20ppm	±25ppm	±30ppm	±50ppm	±100ppm
<b>J</b>	<b>G</b>	<b>F</b>	<b>E</b>	<b>D</b>	<b>B</b>	<b>C</b>	<b>A</b>

Other adjustment tolerances are available.

**Table 3: Load capacitance**

10pF	12pF	16pF	18pF	20pF	30pF	32pF	Series
<b>A</b>	<b>R</b>	<b>K</b>	<b>Q</b>	<b>C</b>	<b>E</b>	<b>F</b>	<b>S</b>

Other load capacitances are available. Min. 6pF